



Transfer air grille between two rooms. Can be installed either in the door or in the wall, recommended installation depth is 30-50 mm. When thickness of the construction is more than 50 mm has one door grille to be installed on both sides. No visibility through the grille. Free area is approximately 50 %.

Material and surface treatment

Manufactured of aluminium profiles. As standard painted white RAL 9016. Other RAL colours are available at additional costs


Order key

Door grille KIO-200 x 100
 1 2

1 = Length L mm


2 = Height H mm

Performance

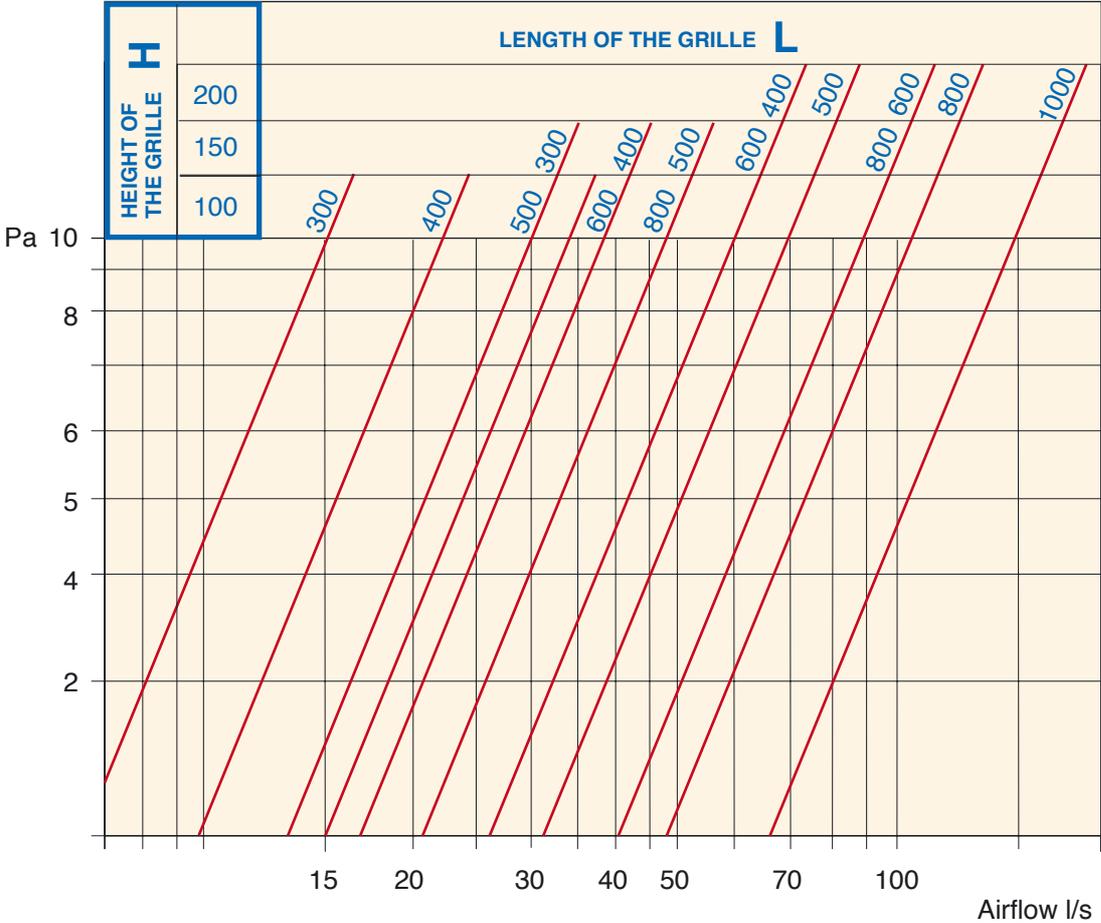

The sound level is less than 25 dB(A),
 when pressure drop is less than 20 Pa.
 Recommended pressure drop max 15 Pa

Dimensions

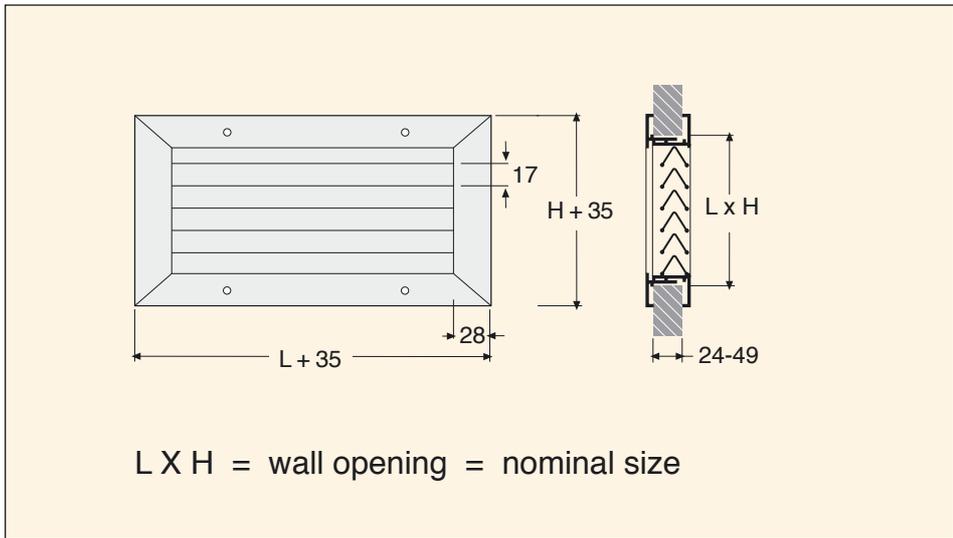

- Standard sizes L x H**
- 300 x 100
 - 400 x 100
 - 500 x 100
 - 300 x 150
 - 400 x 150
 - 500 x 150
 - 600 x 150
 - 400 x 200
 - 500 x 200
 - 600 x 200
 - 800 x 200